

Features

- ◆ Intel® H110+LGA1151 CPU
- ◆ 2 x U-DIMM DDR4-2133MHz, Up to 64GB
- ◆ 2 x DP, 1 x HDMI, 1 x VGA
- ◆ 3 x SATA, 1 x mSATA
- ◆ 4 x USB3.0, 6 x USB2.0, 6 x RS232
- ◆ 2 x RJ45, 1 x Mini-PCle for WIFI/BT/3G/4G, 1 x SIM Slot


Core System

CPU	Intel® H110+LGA1151
BIOS	AMI Source Code
Chipset	H110
System Memory	2 x U-DIMM DDR4-2333MHz, Up to 64GB
GPU	Intel® HD Graphics 530
Graphic Engine	DirectX 11, OpenGL 4.3 and OpenCL 1.2
Network Controller	2 x Realtek RTL8111F Gigabit Ethernet
Audio	ALC662-VD
SIO	ITE8782F
Storage	3 x SATA, 1 x mSATA

Ordering Information

DT-H110DL-V	CPU: 110+LGA1151, RAM:Up to 64G 2 x DP, 1 x HDMI, 1 x VGA 3 x SATA, 1 x mSATA 4 x USB3.0, 6 x USB2.0, 6 x RS232, 2 x RJ45
-------------	--

Dimensions and Drawing

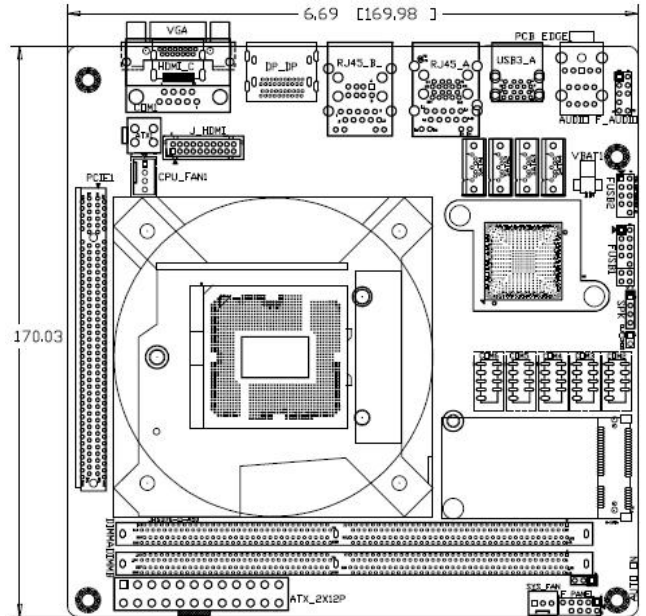

Rear I/O

USB	4 x USB 3.0, 2 x USB 2.0
Display Interface	2 x DP (Max. 4096 x 2304@60Hz) 1 x VGA (Max. 2048 x 1536@60Hz)
Ethernet	2 x RJ45
Serial	1 x RS232
Audio	1 x MIC-IN, 1 x LINE-IN, 1 x LINE-OUT

Internal I/O

USB	4 x USB 2.0
Display Interface	1 x HDMI (Max. 4096 x 2304@24Hz)
Serial	5 x RS232
Mini-PCle	1 x Full-size Mini-PCle for mSATA 1 x Full-size Mini-PCle for WIFI/BT/3G/4G
SIM	1 x SIM Slot

Mechanical and Environmental

Dimensions	170mm x 170mm
Power Requirement	ATX 24+4pin
Operation System	Windows 7/8.1/10/Android/Linux
Storage Temperature	-40° C ~ 75° C (-40 ~ 167° F)
Operating Temperature	0 ~ 60° C (32 ~ 140° F)
Relative Humidity	95% @60° C (non-condensing)

