

DN84-I User Manual



Statement

The copyright of this manual belongs to Shenzhen JIEHE Technology Development Co., Ltd. (Giada, JIEHE's global brand) and all rights are reserved. The company reserves the right to change this manual at any time without notification. Specifications here are for reference only, please take the real product as standard.

Without official authorization of Giada, other company or individual may not copy, plagiarize, translate or disseminate this manual for commercial purpose.

The information provided in this manual is accurate and reliable. The company does not take any legal responsibility for the consequences of infringement use of this manual.

Safety Notice

- Read the user manual carefully before setting up the Giada product.
- Disconnect the power cord before installing the internal components
- Most electronic components are sensitive to static electrical charge, please wear a wrist-grounding strap when installing the internal components.
- Don't disconnect the power cord when the system is running to avoid damage to the sensitive components caused by instantaneous surge voltage.

Contact Information

Shenzhen JIEHE Technology Development Co., Ltd.

Website: www.giadatech.com

Phone: +86-755-3330 0336

Email: support@giadatech.com

Address: 37F, Holdfound Sky Plaza Office Building, 11008 Beihuan Blvd.,
Nanshan, SZ, China, 518051

Table of Contents


1. Product Introduction	4
2. Interface Description and Hardware Specifications	4
2.1 Interface Description	4
2.2 Hardware Specifications	4
3. Accessories Installation Steps	6
3.1 SIM Card Installation	6
3.2 4G Module Installation.....	7
4. Firmware Upgrade Guide	8
4.1 Preparation	8
4.2 Upgrade the firmware.....	8
4.2.1. Install the driver in your host PC by following steps	8
4.2.2. Connect the DN84 with host PC	9
4.2.3. Start the firmware updating	11
5. JAHC APP	12
5.1 JAHC APP function	12
5.2 Startup (open) & shutdown (close) time setup	12
6. ADB SOP	15
7. AI Video Enhancement	16

1. Product Introduction

Based on Rockchip RK3576 platform, Giada DN84 adopts an octa-core ARM processor with integrated NPU, supporting efficient edge AI computing. It features onboard memory and eMMC storage. With dual HDMI display outputs, it supports 4K resolution. Wi-Fi 6, Bluetooth and optional 4G network are supported. It is fanless design and features built-in video enhancement technology to improve image clarity and detail, making it well suited for digital signage, retail displays, and kiosk applications, where enhanced video processing improves image clarity and overall visual experience.

2. Interface Description and Hardware Specifications

2.1 Interface Description

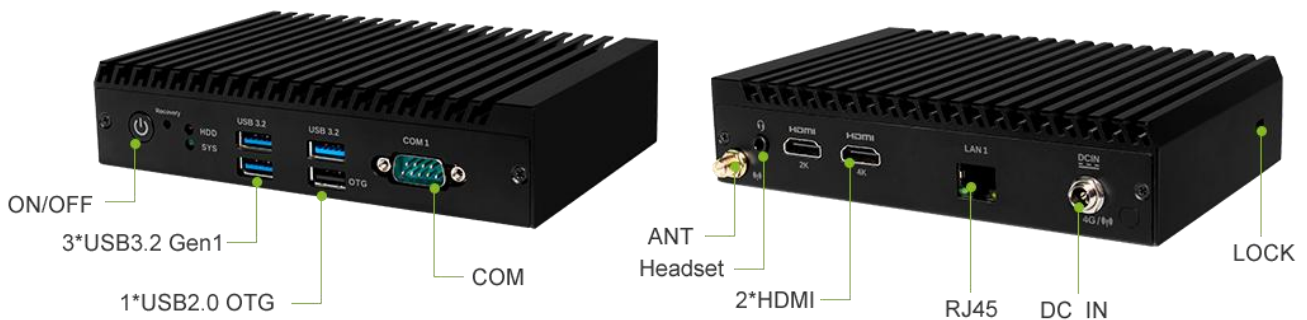

2.2 Hardware Specifications

Processor	CPU	Rockchip RK3576 processor
	Processing Units	4 Cores Cortex-A72 & 4 Cores Cortex-A53
	NPU	6 TOPs, support int4/int8/int16/FP16/BF16/TF32 acceleration
	TDP	6W

Memory	Type	4 GB, Onboard LPDDR4/LPDDR4x
	Socket	Onboard
	Max Capacity	Optional 8GB
Graphics	GPU	ARM Mali-G52MC3
	Graphic Engine	OpenGL ES3.2, OpenCL2.0, Vulkan
	Multi-Media	8K30 H.264/H.265/VP9/AV2/AVS2 Decoder 4K60 H.264/H.265 Encoders
	HDMI	1 x HDMI (Max. 3840 x 2160 @60 Hz) 1 x HDMI (Max. 2560 x 1600 @60 Hz)
Network	Controller	Realtek RTL8211F Gigabit Ethernet
	Interface	1 x RJ45 (Optional: 2 x RJ45)
I/O Interface	USB	3 x USB3.2 Gen1, 1x USB2.0 (OTG)
	Serial Port	1 x RS232 (Optional: 1 x RS232, 2 x RS485)
	Audio	1 x 2-in-1 Headset (MIC-IN & AUDIO-OUT)
	WiFi/BT	Onboard Wi-Fi/BT module
	SIM	1 x SIM Slot
	M.2	1 x B-key M.2 (3042) for 3G /4G
Storage	eMMC	64 GB, Onboard eMMC
	M.2	Optional: 1 x M-Key M.2(2242) PCIe3.0 X4 for SSD
JAHC	JAHC	Watchdog / Auto power on/ RTC
Operation System	OS	Android 14 / Debian 12
Power	Power Type	Lockable DC-IN
	Input Voltage	12 V/3A
Mechanical	Construction	Metal
	Mounting	VESA Mounting Kit (JC502) / Wall Mounting Kit (JC283)
	Dimension (W x D x H)	165 mm x 108 mm x 40 mm (6.50" x 4.25" x 1.57")
	Color	Black
Environment	Operating Temperature	0°C ~45°C (32°F~113°F) @0.7m/s Air Flow
	Relative Humidity	95%@40°C (non-condensing)
Certification		CE, FCC Class B, UKCA

3. Accessories Installation Steps

▲ For safety reasons, please ensure that the power cord is disconnected before opening the case.

How to open the top cover and bottom cover


1. Remove the screws on the bottom side, rear panel, and the lockable DC power connector.
2. Slide the bottom cover in the indicated direction, then lift it to open.
3. Disconnect the antenna cable.
4. Remove the bottom cover completely.
(M.2 slot for 3G/4G and SIM card slot are on the bottom side).



3.1 SIM Card Installation

▲ This product supports standard SIM card with the size of 12.3mm × 8.8mm.

1. Locate the SIM card holder on the mainboard.
2. Slide the holder to the open position.
3. Insert the SIM card into the holder.
4. Slide the holder to the locked position to secure the SIM card in place.

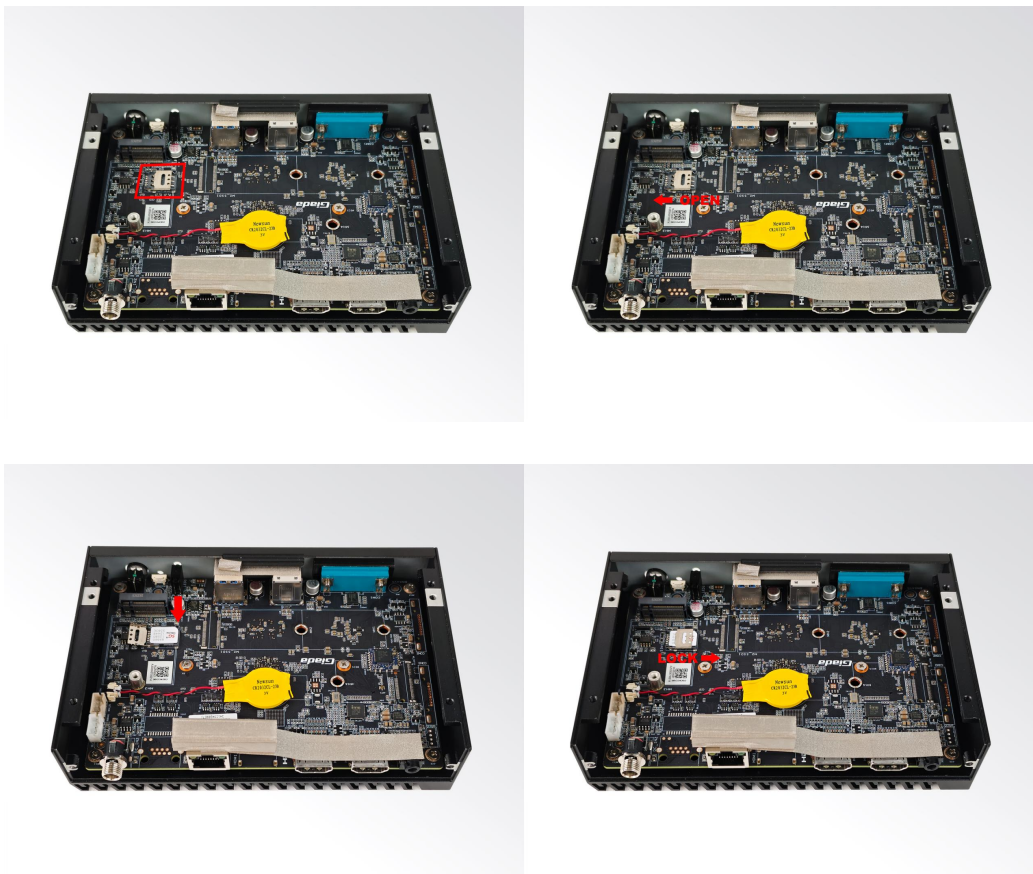

3.2 3G/4G Installation

- ▲ Default SMA connector and cable is for WIFI. Please change to 3G/4G SMA connector and cable.
1. Locate the M.2 WWAN slot on the mainboard.
 2. Insert the module into the slot at an angle of approximately 30°.
 3. Press the module down and secure the module with a screw to fix it in place.
 4. Connect the antenna cable to the antenna connector on the module. Route the antenna cable properly and connect them to the external antenna.





4. Firmware Upgrade Guide

4.1 Preparation:

- DN84 player
- Archive of DN84 firmware provided by Giada technical support
- Host PC with screen and installed the Windows operation system.
- USB OTG Cable (RP-SMA Male↔RP-SMA Male)



After you get the Archive from Giada technical support, copy the Archive to your host PC, you will find below files inside:


- Android Tool - tool for updating
- DriverAssitant - tool to install drivers and firmware image file
- DN84 Firmware image.

DriverAssitant_v5.1.1	2026/3/18 9:14	文件夹	
RKDevTool_v2.93	2026/3/18 9:14	文件夹	
DN84-U-GIADALOGO-20260317-for_TNNT.img	2026/3/18 9:30	光盘映像文件	2,317,949...


4.2 Upgrade the firmware

4.2.1. Install the driver in your host PC by following steps:


- a. Click the DriverAssitant file. Launch RK DriverAssitant and press “Install Driver”.

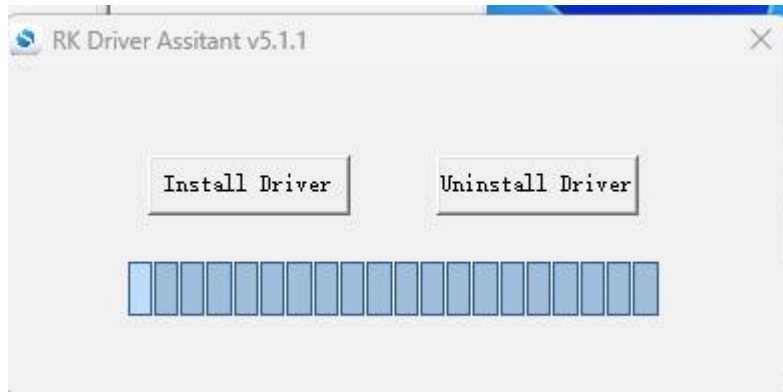

Apply all changes and warnings during the installation.

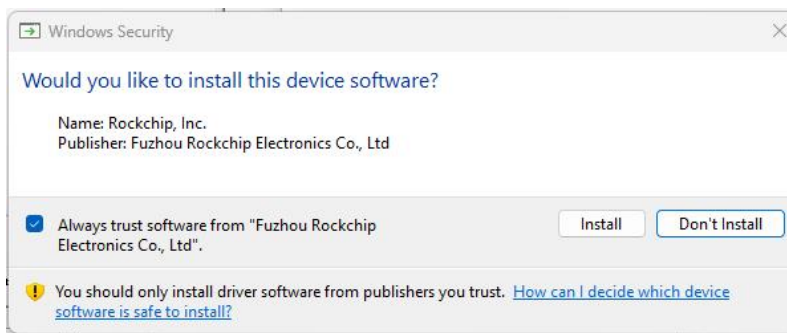

b. Click “ok” after the installation finish

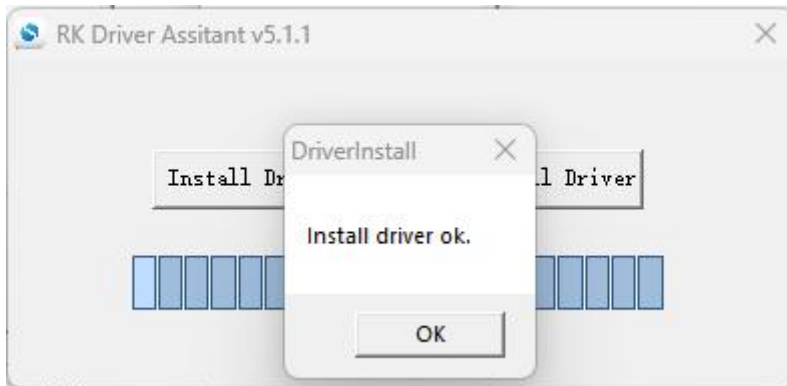


4.2.2. Connect the DN84 with host PC


In order to connect the DN84 with Host PC and run bootloader mode, you should perform following steps:



- a. Please ensure that the power of the DN84 player is disconnected
 - b. Run Android tool V2.93 under the windows of the host PC.
 - c. Connect the DN84 player to the host PC via USB OTG port (please refer to Fig1 for location of the OTG port)
 - d. Firstly, hold the DN84 player recovery button (please refer to Fig1 for the location of the button), then connect the power adaptor to the player, you will see “Found a MSC Device” or “Found One Loader Device”. (Please refer to Fig2)
- ⚠ Please don't loosen the button and don't press twice until you see the 'Found a MSC Device' or 'Found One loader device'

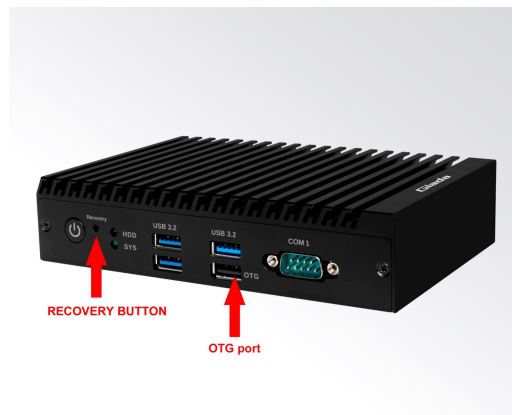


(Fig1)

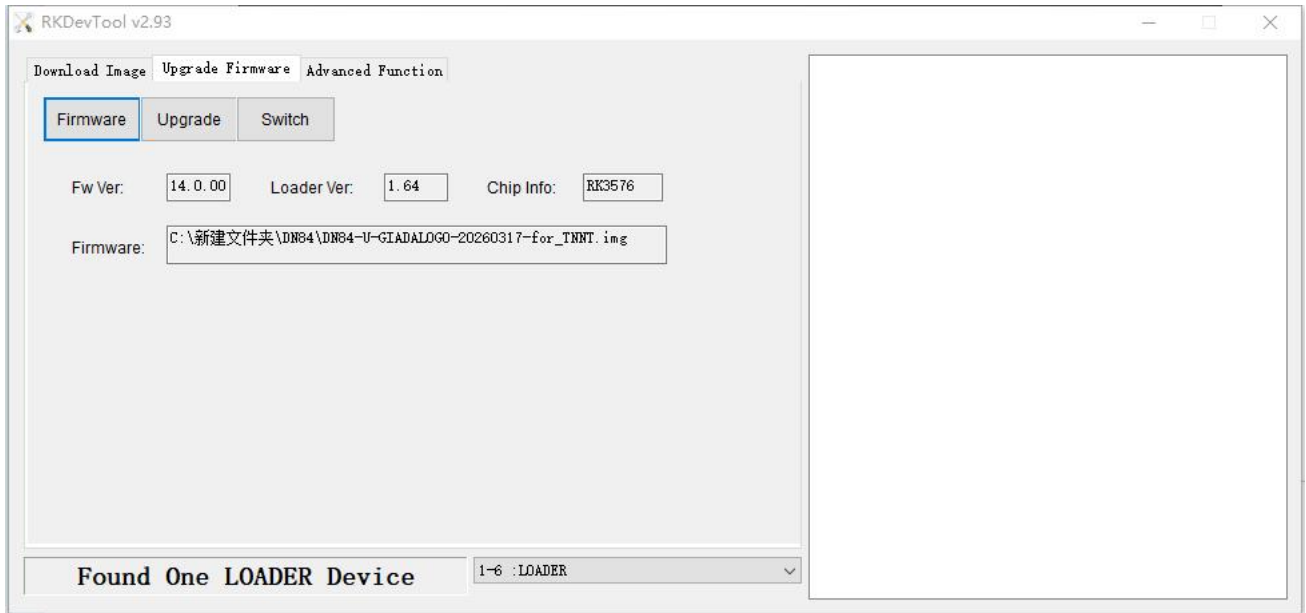


(Fig2)

4.2.3. Start the firmware updating.

- a. Click “Firmware” button and specify the path to the firmware file which is stored in the host PC (Please refer to Fig2).
- b. Wait around 5 seconds to upload the program, FW information will display on the screen. After the “Upgrade” button turns to black, you can click “Upgrade” to update the firmware (please refer to Fig3 and Fig4).

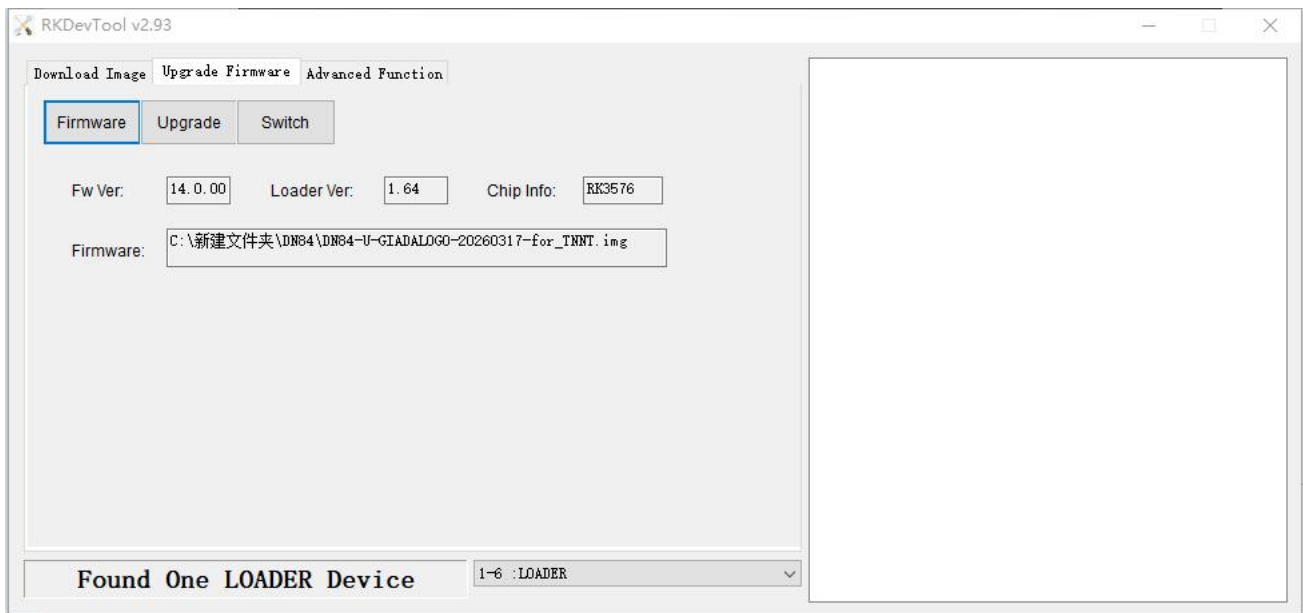


(Fig3)

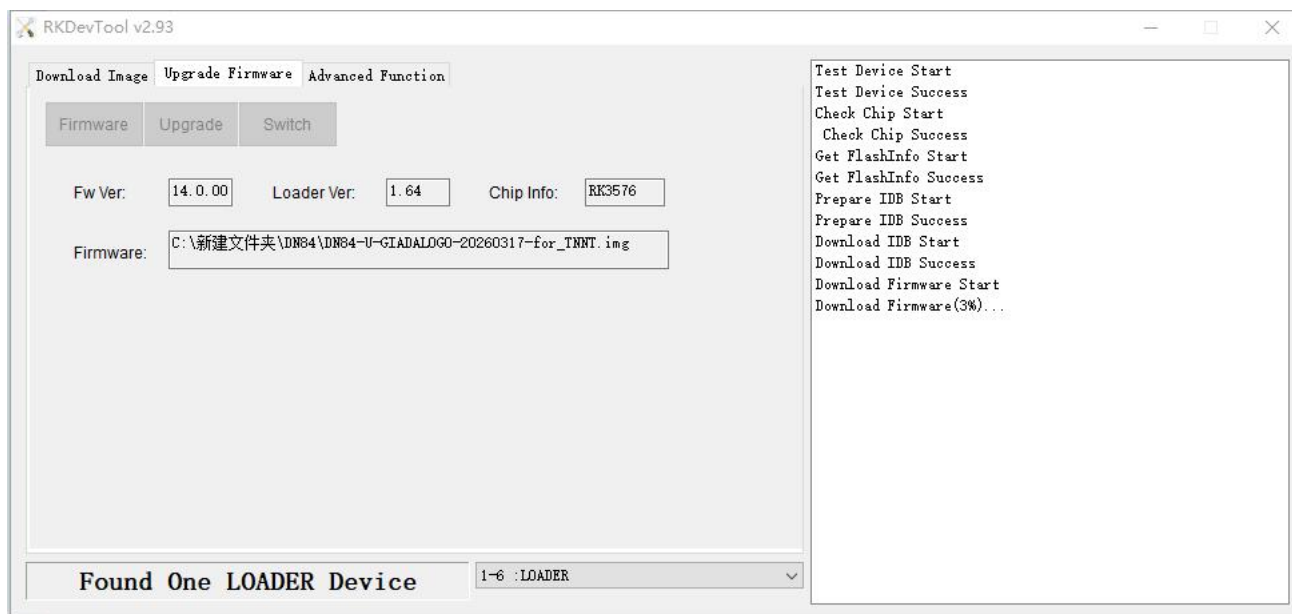

(Fig4)

b. In the end, you will see a report indicating a successful operation.

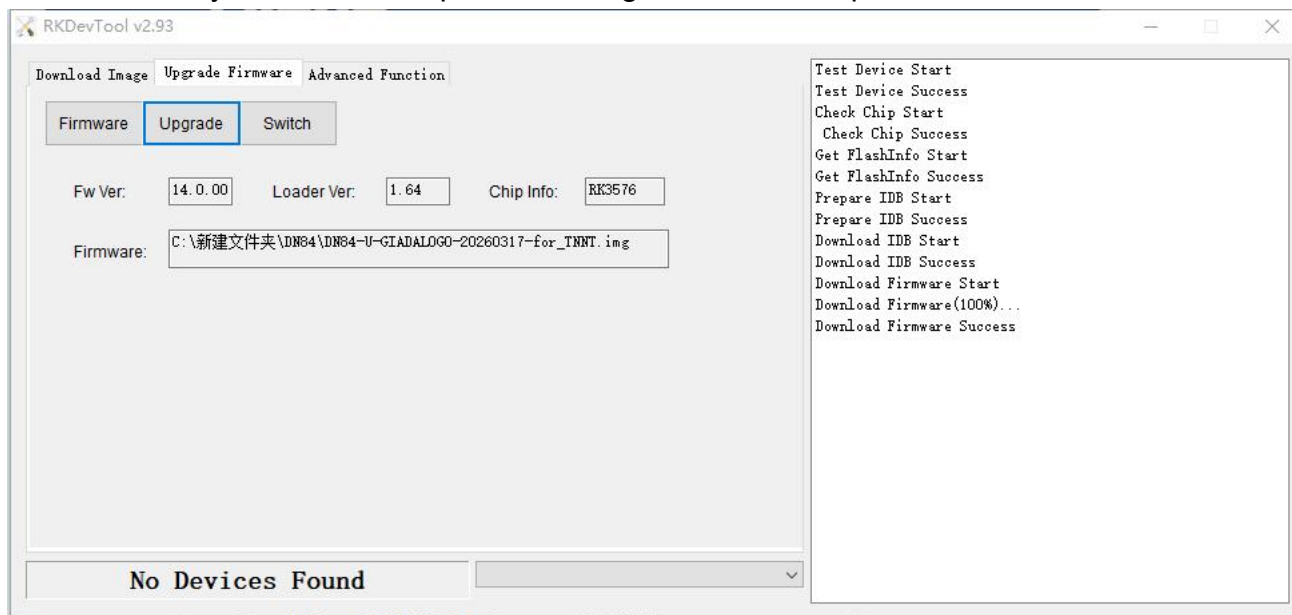

5. JAHC APP


5.1 JAHC APP functions

The user can set up automatic startup and shutdown, one week as a circle

5.2 Startup (open) & shutdown (close) time setup


System Requirements:

- Giada player with JAHC APP function.
- Android OS includes JAHC APP (please refer to Fig1) .

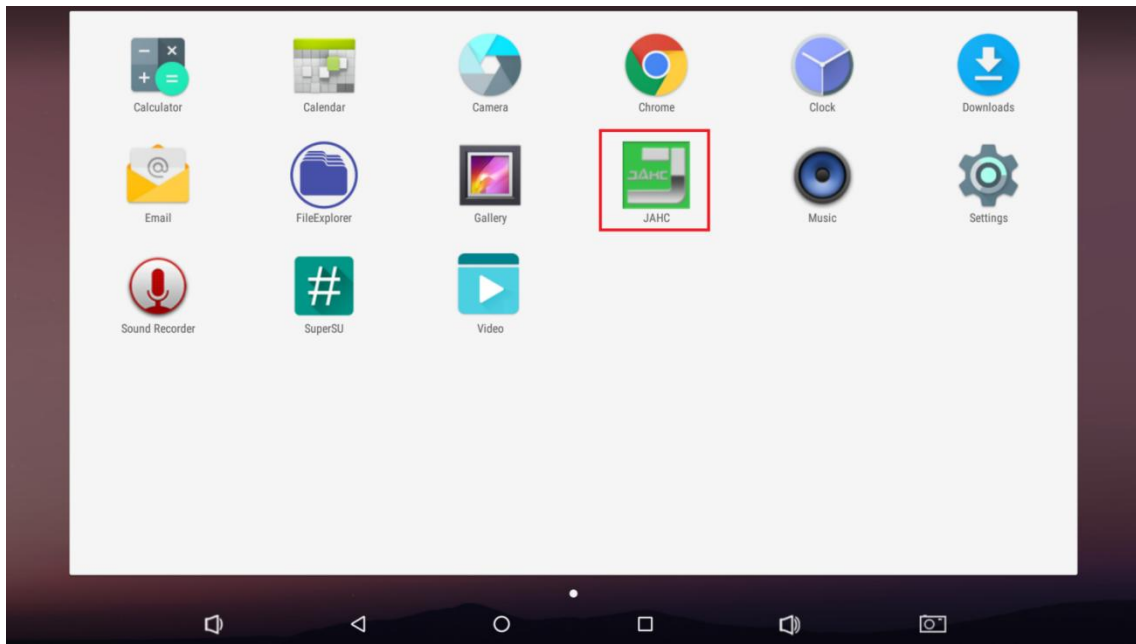

(Fig1)


a. After enter the Android desktop, click the JAHC APP icon and the JAHC interface will pop up (please refer to Fig2)

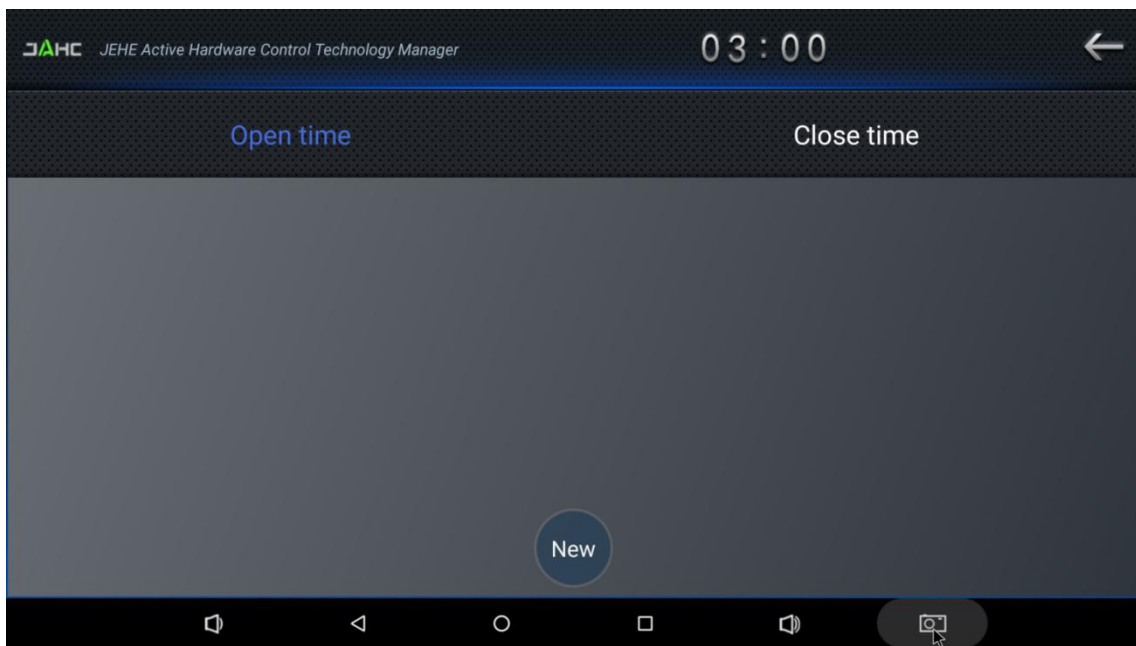


(Fig2)

b. Click 'New' button to set open time (Fig3) and then click Close time button to set close time. One week as a circle, maximum 3 schedules per day. Select each schedule to set up the Open time and Close time.


c. After finishing the setup, click circles to launch the schedule. User can click delete to remove the schedule.

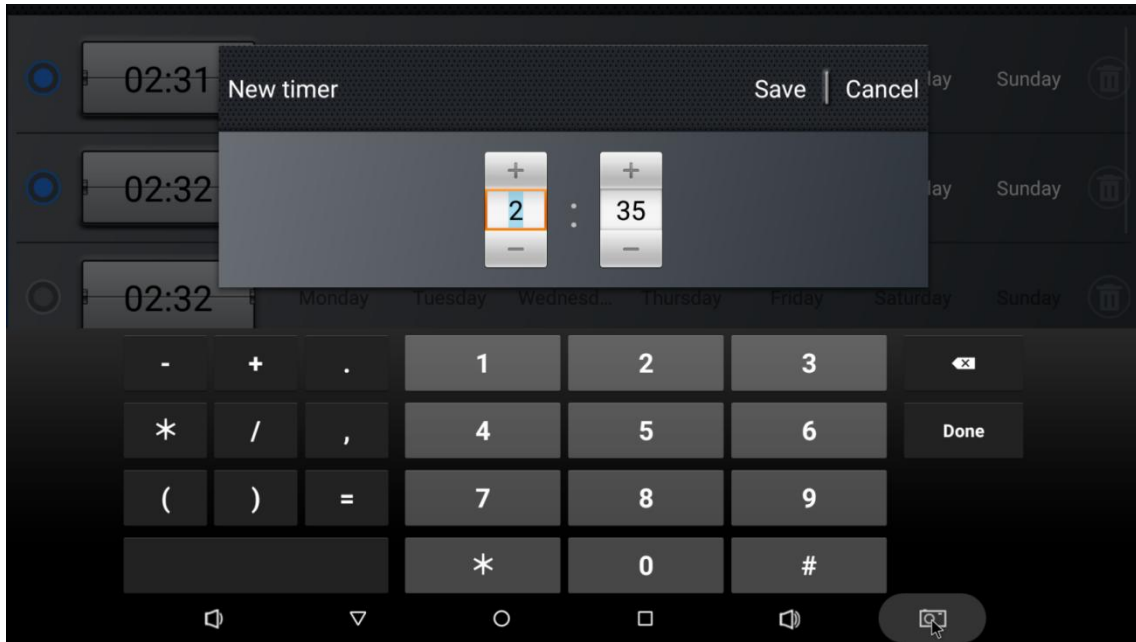

(Fig3)

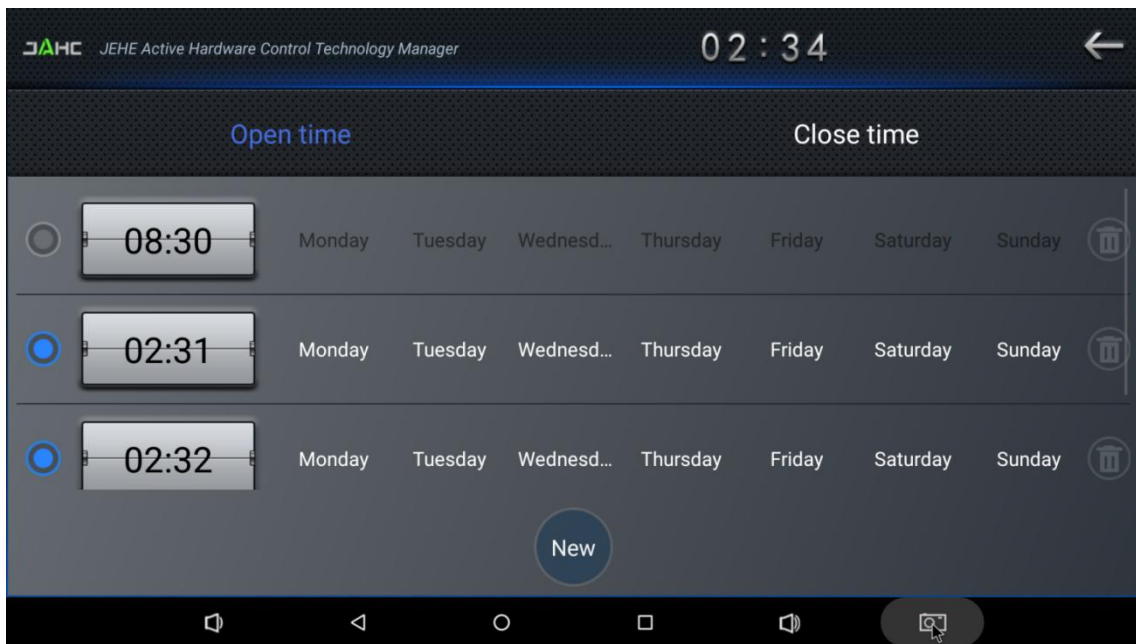

(Fig4)

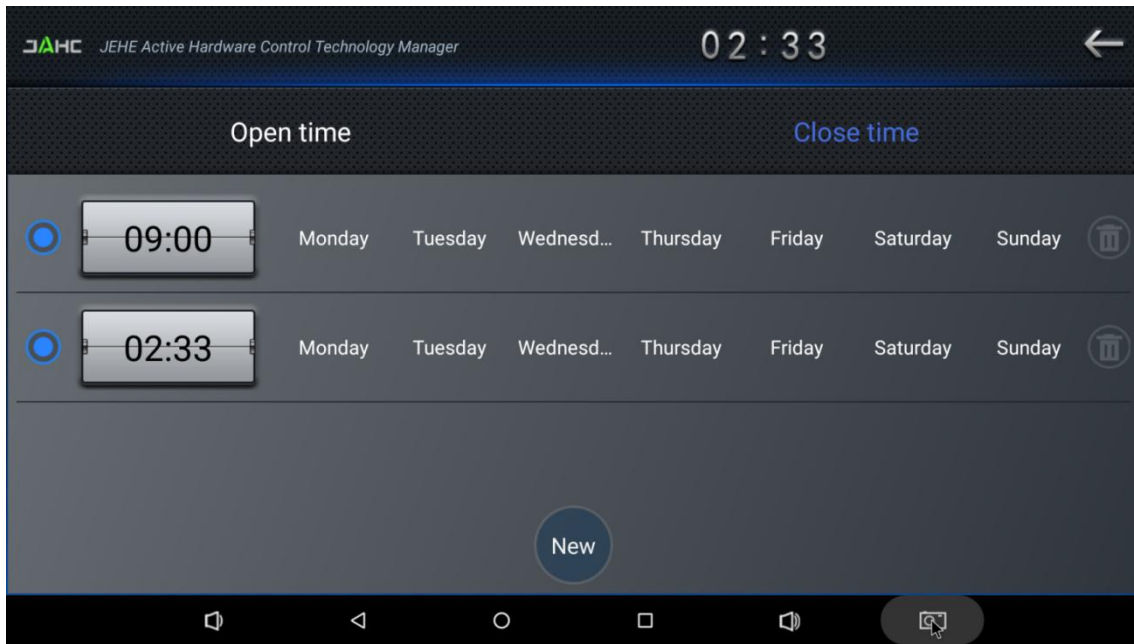

(Fig5)

▲ Caution: If the interval from shutdown time to next resume time is less than 3 minutes, the system will not shut down.

6. ADB SOP


The user can debug APP with ADB driver by below steps:

a. Use command ADB version to check if Windows ADB tool is installed.

```
Admin: C:\Windows\system32\cmd.exe
C:\Users>adb version
Android Debug Bridge version 1.0.31
C:\Users>
```

b. Install Rock chip driver.


- Connect DN84 with windows PC host by OTG cable.
- Select 'Connect to PC' under android OS->Settings->USB->connect to PC.
- Then you can use ADB shell command to enter ADB.

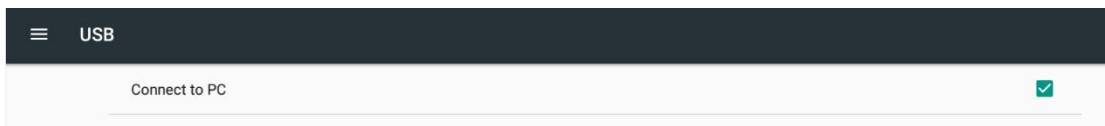

```
C:\Users>adb shell
rk3288 _all:/ $
```

7. AI Video Enhancement Technology

Navigate to **Settings > Display**, then enable AI Super Visual Enhancement using the toggle switch.

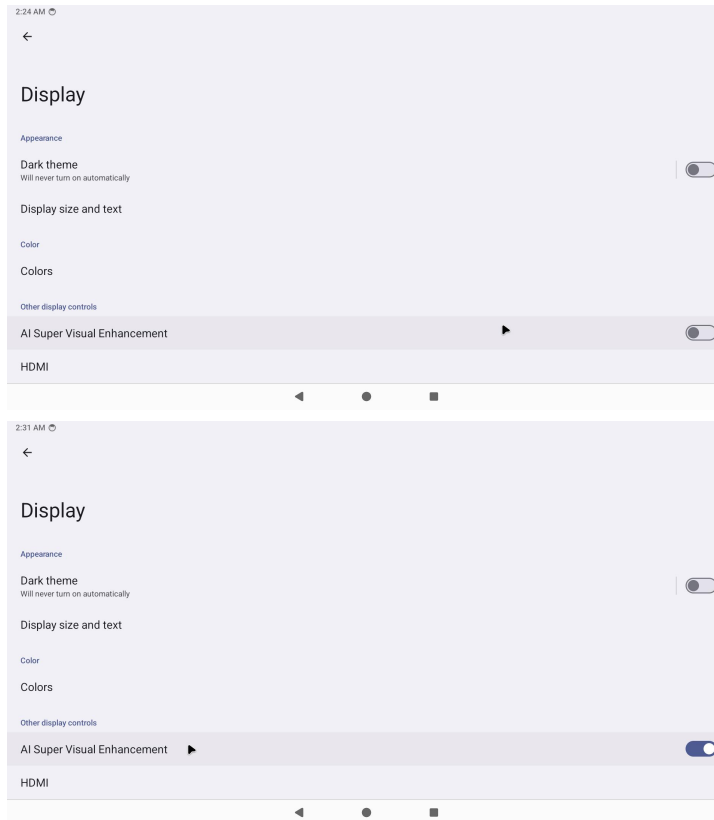



Shenzhen JIEHE Technology Development Co., Ltd.

Website: www.giadatech.com

Phone: +86-755-3330 0326

Email: support@giadatech.com

Address: 37F, Holdfound Sky Plaza Office Building, 11008
Beihuan Blvd., Nanshan, SZ, China, 518051



The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.